

QUESTIONS & ANSWERS

Kill your exam at first Attempt



Juniper

JN0-347

Enterprise Routing and Switching, Specialist (JNCIS-ENT)

QUESTION: 57

Which two OSPF LSA types will you see in a stub area? (Choose two.)

- A. network (Type 2)
- B. summary (Type 3)
- C. ASBR summary (Type 4)
- D. external (Type 5)

Answer: A, B

QUESTION: 58

You disconnected a switch from the Virtual Chassis, but the disconnected switch's member ID is still displayed in the status output. Which operational command is used to remove the disconnected member?

- A. request virtual-chassis renumber member-id 3 new-member-id 2
- B. request virtual-chassis vc-port delete pie-slot 2 port 0
- C. request virtual-chassis reactivate
- D. request virtual-chassis recycle

Answer: D

QUESTION: 59

Click the Exhibit button.

```

(master:0)[edit]
user@host# show firewall family ethernet-switching
filter block {
  term 1 {
    from {
      ip-protocol icmp;
    }
    then accept;
  }
  term 2 {
    from {
      ip-source-address {
        172.25.11.1/32;
      }
    }
    then discard;
  }
  term 3 {
    from {
      ip-destination-address {
        172.25.11.0/24;
      }
    }
    then discard;
  }
}

```

Referring to the exhibit, which two statements are correct? (Choose two.)

- A. All traffic destined to the 172.25.11.0/24 subnet will be discarded.
- B. SSH traffic received from host IP 172.25.11.2 will be accepted.
- C. Any traffic not matched by one of the terms will be discarded.
- D. ICMP echo requests destined to 172.25.11.10 will be accepted.

Answer: C, D

QUESTION: 60

Which statement is true about load balancing of equal cost paths?

- A. A load-balancing policy must be configured under the policy-options hierarchy.
- B. The route preference parameter must be manually set to the same value.
- C. The maximum-paths parameter must be configured under the routing-options hierarchy.
- D. Traffic is balanced across equal cost paths by default.

Answer: D

QUESTION: 61

What is the default BGP group type on a Junos device?

- A. internal
- B. external
- C. multihop
- D. null

Answer: B

QUESTION: 62


Which two statements are true about nonstop bridging (NSB)? (Choose two.)

- A. NSB does not require all participating Routing Engines to run the same version of the Junos OS.
- B. NSB can be enabled under the protocols layer2-controlhierarchy.
- C. NSB requires you to configure graceful Routing Engine switchover (GRES).
- D. NSB does not require you to configure graceful Routing Engine switchover (GRES).

Answer: B, C

QUESTION: 63

Click the Exhibit button.

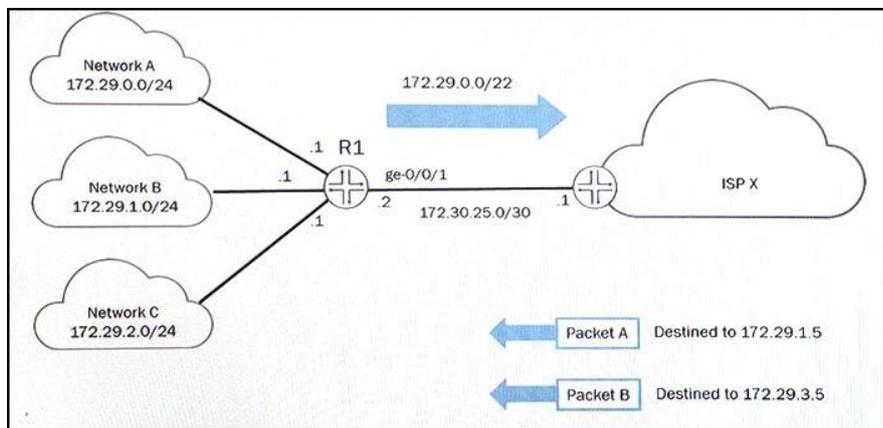

Referring to the exhibit, when using the default routing behavior, what happens to Packet A and Packet B on R1?

- A. Packet A is rejected and Packet B is forwarded to its destination.
- B. Packet A is forwarded to its destination and Packet B is rejected.
- C. Packet A and Packet B are forwarded to their respective destinations.

D. Packet A and Packet B are discarded.

Answer: B

QUESTION: 64

Which Junos feature allows you to combine multiple interfaces into a single bundle?

- A. VRRP
- B. Virtual Chassis
- C. LAG
- D. NSB

Answer: C

QUESTION: 65

You are asked to ensure that a designated interface on an EX Series switch only allows a specific server to pass traffic. Which two features are required to satisfy this solution? (Choose two.)

- A. IP source guard
- B. proxy ARP
- C. MAC limiting
- D. persistent MAC learning

Answer: C, D

For More exams visit <https://killexams.com>



[KILLEXAMS.COM](https://killexams.com)

Kill your exam at First Attempt....Guaranteed!